

S16 Features

- Small size (16mm OD)
- Low Cost
- Snap-in polarized connector
- 250/256 to 4,000/4096 cycles per revolution (CPR)
- 1,000/1024 to 16000/16384 pulses per revolution (PPR)
- Single +5V supply



S16 Product Description

The S16 16mm micro-optical shaft encoder is designed to provide A, B, and Index digital quadrature signals for high volume, restricted space applications.

Three shaft torque options are available:

- Default (-D): sleeve bushing with higher damping for human interface applications.
- Ball bearing (-B): miniature precision ball bearings suitable for high-speed applications.
- Light static drag (-N): sleeve bushing with lower damping for low-speed applications.


The S16 rotary encoder is connected using a 5-conductor, polarized, 0.8mm pitch connector (Hirose part number DF52-5P-0.8C). The mating cable (see the Cables web page) is not included and is available separately.



Mechanical Drawings

| S16 Micro Rotary Shaft Encoder

S16 Micro Optical Shaft Encoder

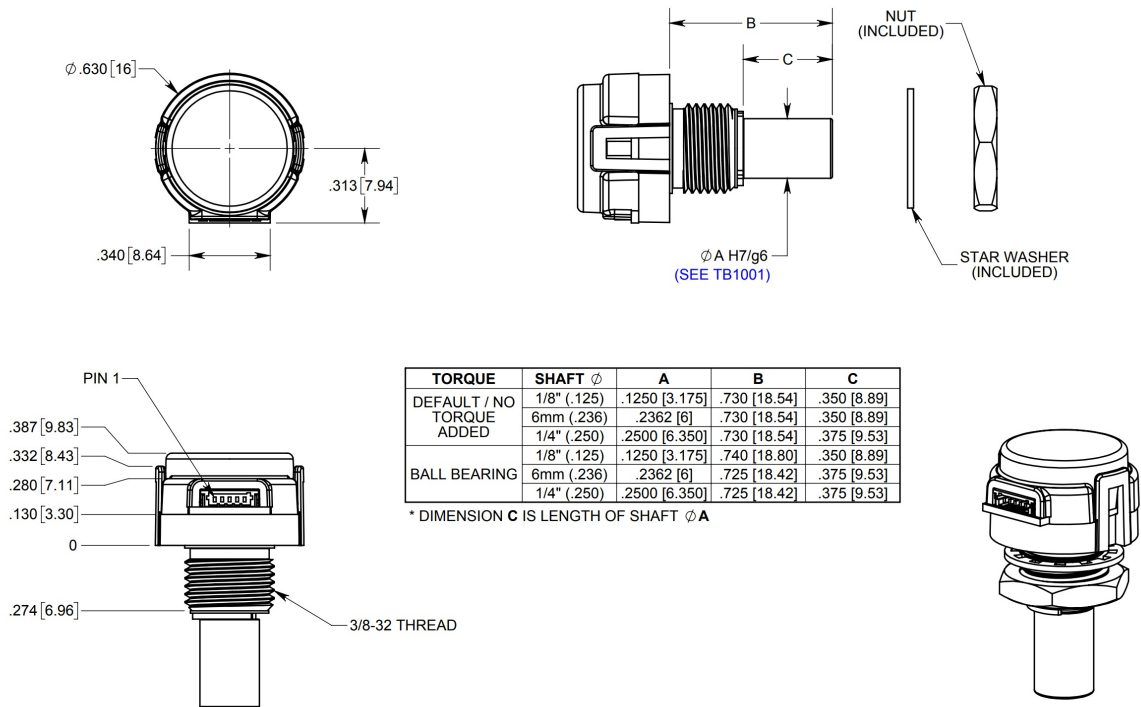

RELEASE DATE: 03/30/2021

US DIGITAL 1400 NE 136th Avenue
Vancouver, Washington 98684, USA

info@usdigital.com
www.usdigital.com

Local: 360.260.2468
Toll-free: 800.736.0194

UNITS: INCHES [MM]
METRIC SHOWN FOR REFERENCE ONLY

Specifications

ENVIRONMENTAL

PARAMETER	VALUE	UNITS
Operating Temperature	-40 to 100	C
Electrostatic Discharge, IEC 61000-4-2	± 12	kV
Vibration (10Hz to 2kHz, sinusoidal)	20	G
Shock (6 milliseconds, half-sine)	75	G

MECHANICAL

SPECIFICATION	SLEEVE BUSHING	BALL BEARING
Max. Acceleration	10000 rad/sec ²	250000 rad/sec ²
Max. Shaft Speed (1) (mechanical)	100 RPM	15000 RPM
Max. Shaft Torque	0.5 in-oz (D-option) 0.3 in-oz (N-option)	0.05 in-oz (B-option)
Max. Shaft Loading	2 lbs. dynamic 20 lbs. static	1 lb.
Bearing Life	> 1000000 revolutions	$L_{10} = (22/F_r)^3 *$ Where L_{10} = bearing life in millions of revs, and F_r = radial shaft loading in pounds
Weight	0.48 oz.	0.43 oz.
Max. Shaft Runout	0.0015 in. T.I.R.	0.0015 in. T.I.R.
Max. Panel Nut Tightening Torque	20 in-lbs	20 in-lbs
Technical Bulletin TB1001 - Shaft and Bore Tolerances	Download (https://www.usdigital.com/support/resources/reference/technical-docs/technical-bulletins/shaft-and-bore-tolerances-tb1001/)	

* Only valid with negligible axial shaft loading.

(1) The maximum speed due to electrical considerations is dependent on the CPR. See the E16 (<https://www.usdigital.com/products/encoders/incremental/kit/e16/>) product page.

ELECTRICAL


PARAMETER	MIN.	TYP.	MAX.	UNITS	NOTES
Supply Voltage	4.5	5.0	5.5	V	
Supply Current		18	26	mA	no load
Low-level Output			0.4	V	$I_{OL} = 4 \text{ mA}$, $V_{CC} = 5V$
		0.1		V	no load
High-level Output	4.7			V	$I_{OH} = 4 \text{ mA}$, $V_{CC} = 5V$
		4.9		V	no load
Output Rise Time		80	135	ns	no load
Output Fall Time		80	135	ns	no load
Maximum Output Frequency					
250/256 CPR	0.2			MHz	
500/512 CPR	0.4			MHz	
1,000/1,024 CPR	0.8			MHz	
2,000/2,048 CPR	1.6			MHz	
4,000/4,096 CPR	1.85			MHz	

PHASE RELATIONSHIP

- Specifications apply over the entire operating temperature range.
- Values are for the worst error over full rotation.
- Refer to the timing diagram below.

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS
Symmetry	X, Y	150	180	210	°e (https://www.usdigital.com/support/resources/glossary/#glossary_e)
Quadrature	Z	60	90	120	°e (https://www.usdigital.com/support/resources/glossary/#glossary_e)
Index Pulse Width	Po	60	90	120	°e (https://www.usdigital.com/support/resources/glossary/#glossary_e)
Ch. I Rise After Ch. B or Ch. A Fall	t1		10		ns
Ch. I Fall After Ch. B or Ch. A Rise	t2		10		ns

TIMING DIAGRAM

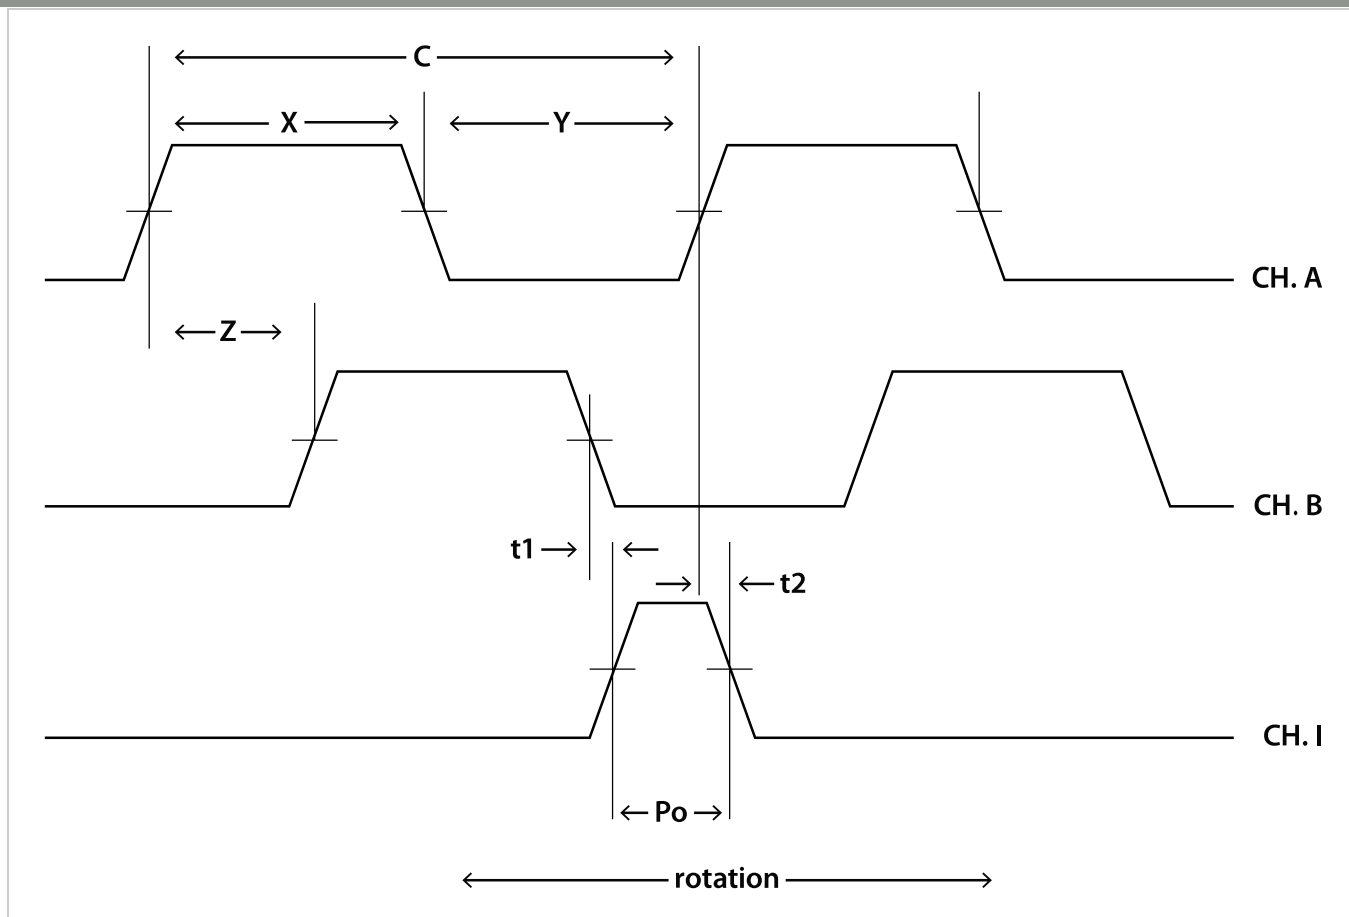

B leads A for clockwise shaft rotation, and A leads B for counterclockwise rotation viewed from the shaft side of the encoder.

PIN-OUT

PIN	DESCRIPTION
1	Ground
2	Index
3	A channel
4	+5VDC power
5	B channel

Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty (<https://www.usdigital.com/company/warranty>) for details.
- Cables and connectors are not included and must be ordered separately.
- For ordering information please configure the product and you'll see the Compatible Cables / Connectors section above.

Configuration Options

S16	-	CPR (Cycles Per Revolution)	-	Shaft Diameter	-	Output	-	Torque
		250		125 (1/8")		S (Single-Ended)		D (Default Torque)
		256		236 (6mm)				B (Ball Bearing)
		500		250 (1/4")				N (Light Static Drag)
		512						
		1000						
		1024						
		2000						
		2048						
		4000						
		4096						

PLEASE NOTE: This chart is for informational use only. Certain product configuration combinations are not available. Visit the S16 product page (<https://www.usdigital.com/products/S16>) for pricing and additional information.